


N-Channel Logic Level Enhancement Mode Field Effect Transistor

Product Summary:

BV <sub>DSS</sub>	60V
R <sub>DS(on)</sub> (MAX.) @V <sub>GS</sub> =10V	5.2mΩ
R <sub>DS(on)</sub> (MAX.) @V <sub>GS</sub> =4.5V	7.5mΩ
I <sub>D</sub> @T <sub>C</sub> =25°C	77A

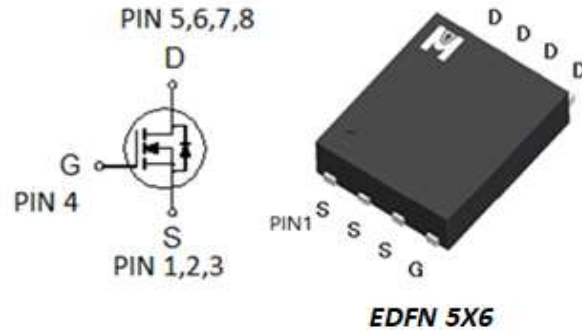

Single N Channel MOSFET

UIS, R<sub>g</sub> 100% Tested

Pb-Free Lead Plating & Halogen Free



ABSOLUTE MAXIMUM RATINGS (T<sub>C</sub> = 25 °C Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNIT
Gate-Source Voltage		V <sub>GS</sub>	±20	V
Continuous Drain Current	T <sub>C</sub> = 25 °C	I <sub>D</sub>	77	A
	T <sub>C</sub> = 100 °C		49	
Pulsed Drain Current <sup>1</sup>		I <sub>DM</sub>	122	
Avalanche Current		I <sub>AS</sub>	25	
Avalanche Energy	L = 0.1mH	E <sub>AS</sub>	31.2	mJ
Power Dissipation	T <sub>C</sub> = 25 °C	P <sub>D</sub>	50	W
	T <sub>C</sub> = 100 °C		20	
Operating Junction & Storage Temperature Range		T <sub>J</sub> , T <sub>stg</sub>	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNIT
Junction-to-Case	R <sub>θJC</sub>		2.5	°C / W
Junction-to-Ambient <sup>3</sup>	R <sub>θJA</sub>		50	

<sup>1</sup>Pulse width limited by maximum junction temperature.

<sup>2</sup>Duty cycle ≤ 1%

<sup>3</sup>50°C / W when mounted on a 1 in<sup>2</sup> pad of 2 oz copper.



ELECTRICAL CHARACTERISTICS (T<sub>J</sub> = 25 °C, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
<b>STATIC</b>						
Drain-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>GS</sub> = 0V, I <sub>D</sub> = 250μA	60			V
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250μA	1.0	2.0	3.0	
Gate-Body Leakage	I <sub>GSS</sub>	V <sub>DS</sub> = 0V, V <sub>GS</sub> = ±20V			±100	nA
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = 48V, V <sub>GS</sub> = 0V			1	μA
		V <sub>DS</sub> = 40V, V <sub>GS</sub> = 0V, T <sub>J</sub> = 125 °C			25	
On-State Drain Current <sup>1</sup>	I <sub>D(ON)</sub>	V <sub>DS</sub> = 5V, V <sub>GS</sub> = 10V	77			A
Drain-Source On-State Resistance <sup>1</sup>	R <sub>DS(ON)</sub>	V <sub>GS</sub> = 10V, I <sub>D</sub> = 15A		4.2	5.2	mΩ
		V <sub>GS</sub> = 4.5V, I <sub>D</sub> = 10A		6.0	7.5	
Forward Transconductance <sup>1</sup>	g <sub>fs</sub>	V <sub>DS</sub> = 5V, I <sub>D</sub> = 15A		69		S
<b>DYNAMIC</b>						
Input Capacitance	C <sub>iss</sub>	V <sub>GS</sub> = 0V, V <sub>DS</sub> = 30V, f = 1MHz		2117		pF
Output Capacitance	C <sub>oss</sub>			1352		
Reverse Transfer Capacitance	C <sub>rss</sub>			79		
Gate Resistance	R <sub>g</sub>	V <sub>GS</sub> = 15mV, V <sub>DS</sub> = 0V, f = 1MHz		0.95		Ω
Total Gate Charge <sup>1,2</sup>	Q <sub>g</sub> (V <sub>GS</sub> =10V)	V <sub>DS</sub> = 30V, V <sub>GS</sub> = 10V, I <sub>D</sub> = 15A		42		nC
Gate-Source Charge <sup>1,2</sup>	Q <sub>gs</sub>			5.5		
Gate-Drain Charge <sup>1,2</sup>	Q <sub>gd</sub>			12		
Turn-On Delay Time <sup>1,2</sup>	t <sub>d(on)</sub>	V <sub>DD</sub> =30V, I <sub>D</sub> =30A, R <sub>g</sub> =6 ohm, V <sub>gs</sub> =10V		9.5		nS
Rise Time <sup>1,2</sup>	t <sub>r</sub>			35		
Turn-Off Delay Time <sup>1,2</sup>	t <sub>d(off)</sub>			49		
Fall Time <sup>1,2</sup>	t <sub>f</sub>			73		
<b>SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS</b>						
Continuous Current	I <sub>S</sub>				77	A
Pulsed Current <sup>3</sup>	I <sub>SM</sub>				122	
Forward Voltage <sup>1</sup>	V <sub>SD</sub>	I <sub>F</sub> = I <sub>S</sub> , V <sub>GS</sub> = 0V			1.3	V
Reverse Recovery Time	t <sub>rr</sub>	I <sub>F</sub> =30A, di/dt=100 A/uS		45		nS
Reverse Recovery Charge	Q <sub>rr</sub>				25	







<sup>1</sup>Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.






<sup>2</sup>Independent of operating temperature.

<sup>3</sup>Pulse width limited by maximum junction temperature.

EMC will review datasheet by quarter, and update new version.

TYPICAL CHARACTERISTICS

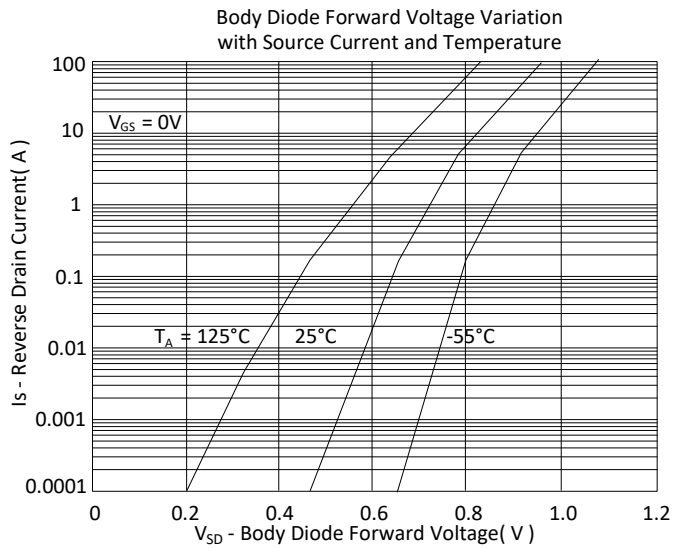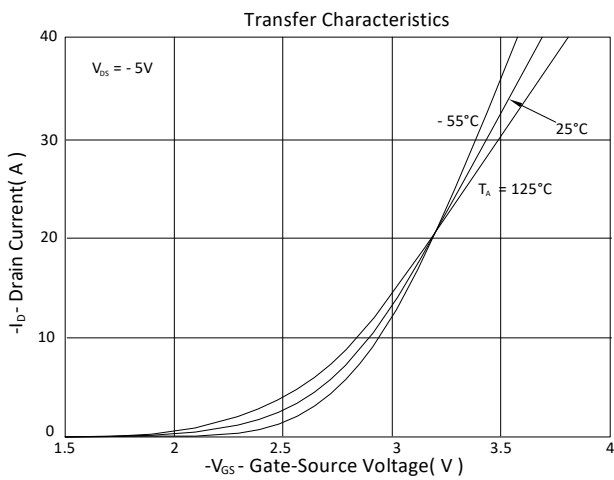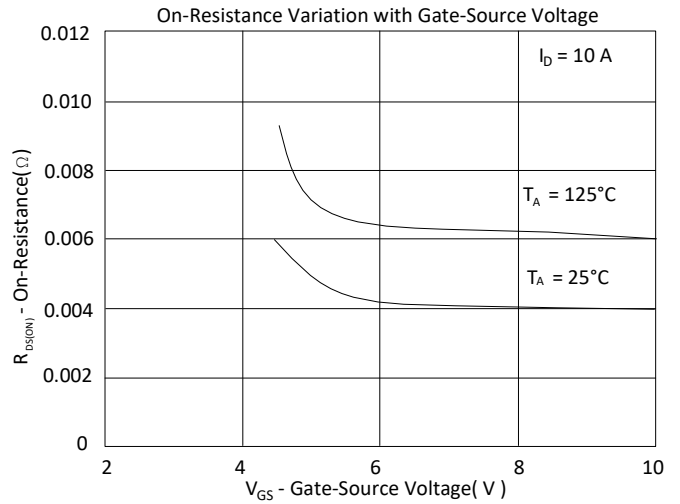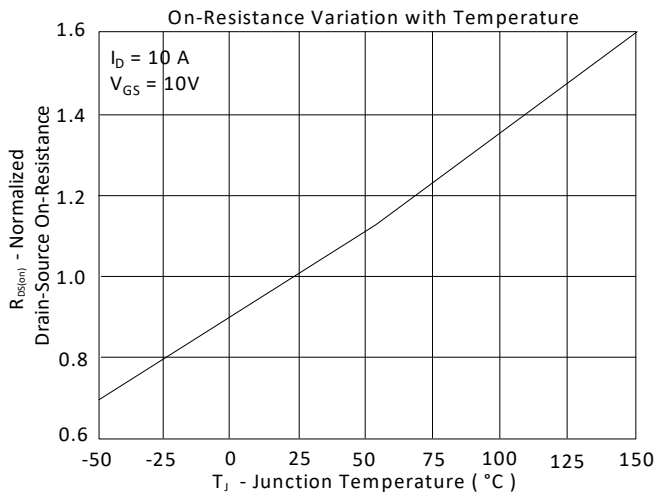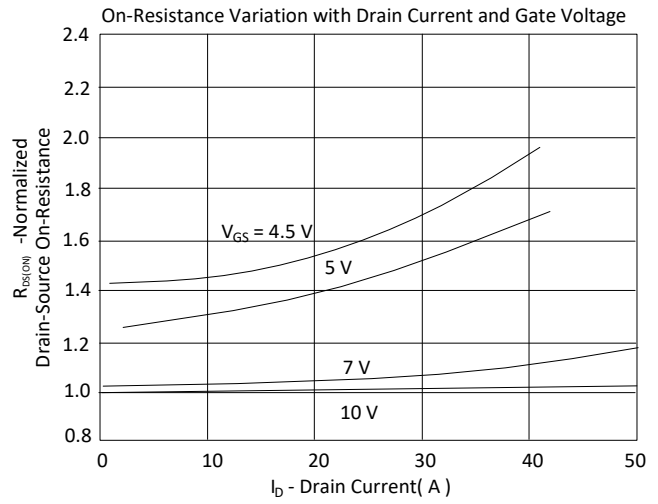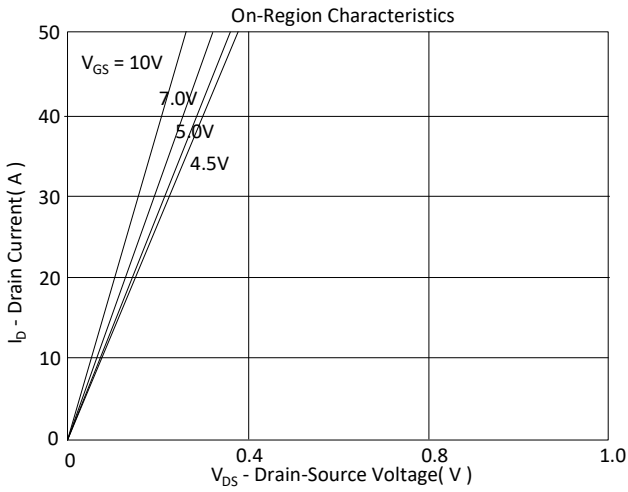

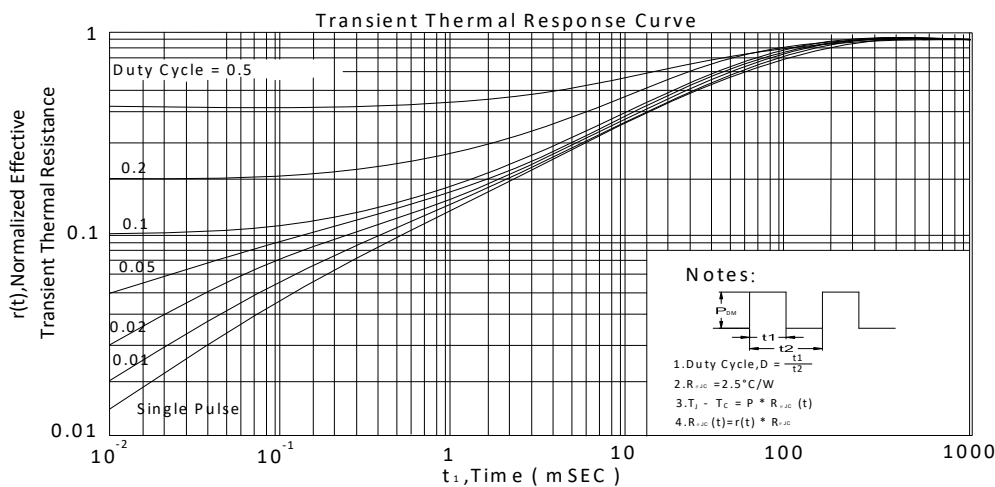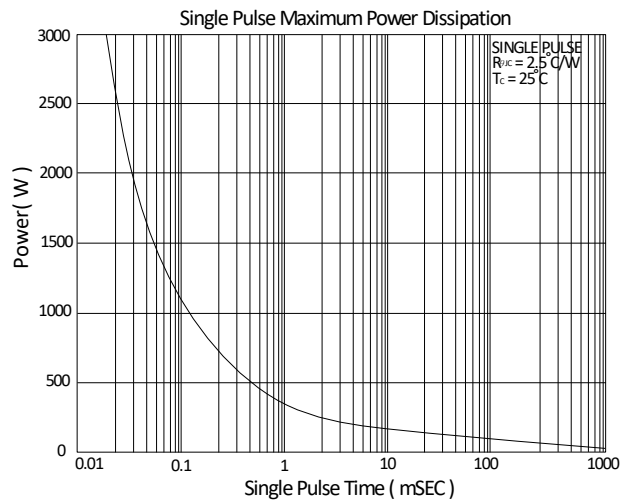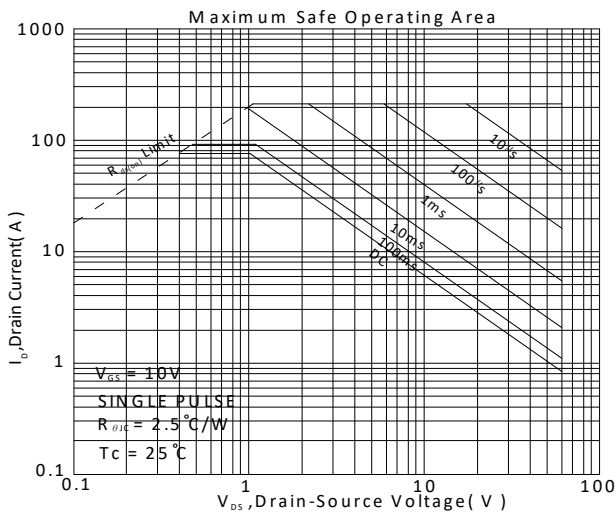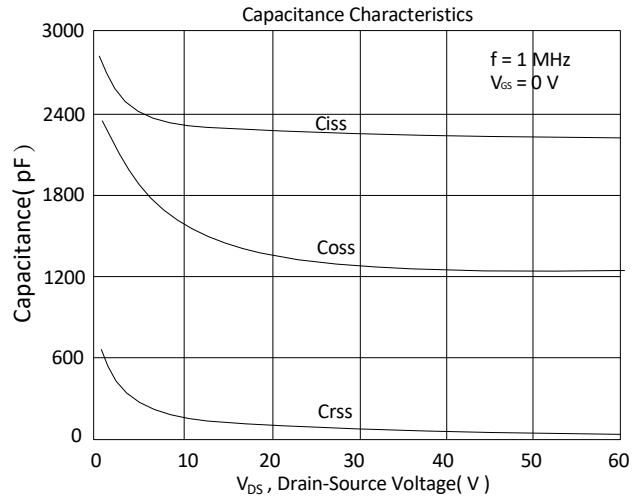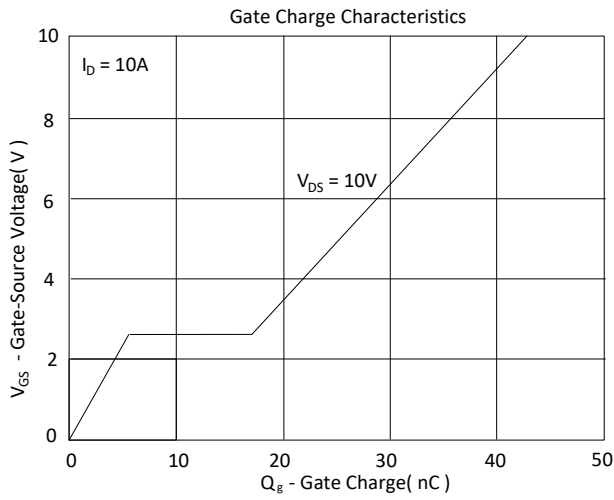

Ordering & Marking Information:

Device Name: EMB06N06HS for EDFN5X6



B06N06S: Device Name

ABCDEFG: Date Code


A: Assembly House

B: Year(A:2008 B:2009 C:2010....)

C: Month(A:01 B:02 C:03 D:04 E:05 F:06 G:07 H:08 I:09 J:10 K:11 L:12)

DEFG: Serial No.


Outline Drawing

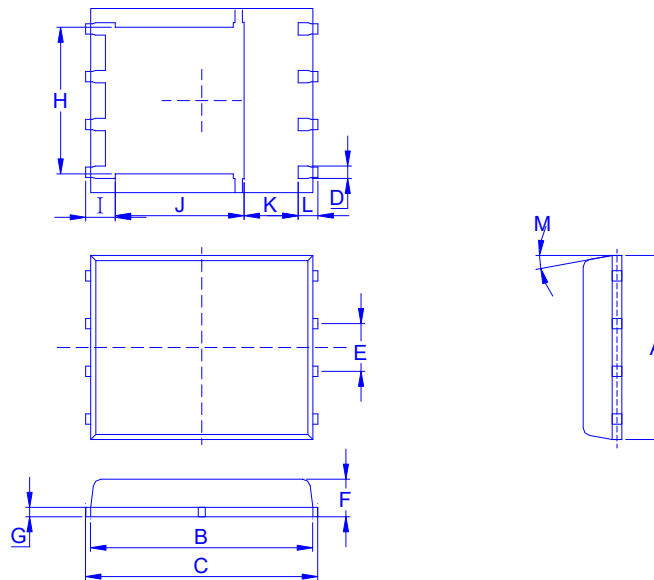

Dimension in mm


Dimension	A	B	C	D	E	F	G	H	I	J	K	L	M
Min	4.80	5.55	5.90	0.30	1.17	0.85	0.15	3.61	0.38	3.18	1.00	0.38	0°
Typ.	4.90	5.70	6.00	0.40	1.27	0.95	0.20	3.87	0.40	3.44	1.20	0.40	
Max	5.40	5.85	6.15	0.51	1.37	1.17	0.34	4.31	0.71	3.78	1.39	0.71	12°


Recommended minimum pads

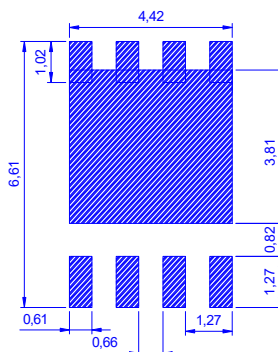



◆ Tape&Reel Information:2500pcs/Reel(Dimension in millimeter)

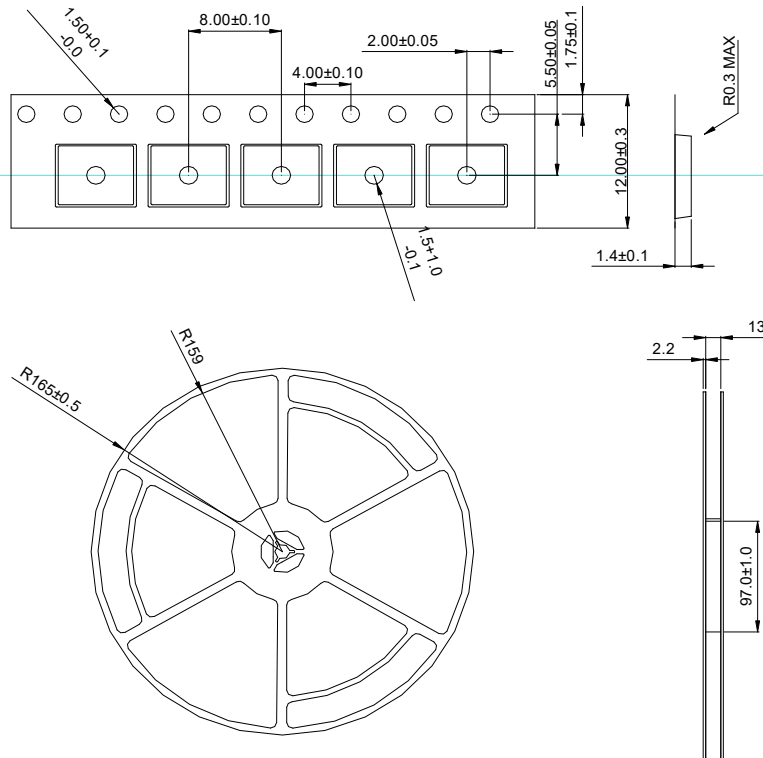

產品別	EDFN5X6
Reel 尺寸	13"
編帶方式	FEED DIRECTION 
前空格	25
後空格	50
裝箱數	
滿捲數量	2.5K
捲/內盒比	1 : 1
內盒滿箱數	2.5K
內/外箱比	10 : 1
外箱滿箱數	25K