
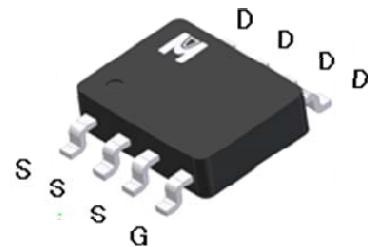


P-Channel Logic Level Enhancement Mode Field Effect Transistor

Product Summary:

BV _{DSS}	-40V
R _{DSON} (MAX.)	18mΩ
I _D	-9.5

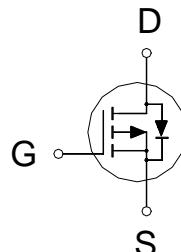

UIS, R_G 100% Tested

Pb-Free Lead Plating & Halogen Free



ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNIT
Gate-Source Voltage		V _{GS}	±20	V
Continuous Drain Current	T _A = 25 °C	I _D	-9.5	A
	T _A = 70 °C		-7.5	
Pulsed Drain Current ¹		I _{DM}	-38	
Avalanche Current		I _{AS}	-10	
Avalanche Energy	L = 0.1mH, I _D =-10A, R _G =25 Ω	E _{AS}	5	mJ
Repetitive Avalanche Energy ²	L = 0.05mH	E _{AR}	2.5	
Power Dissipation	T _A = 25 °C	P _D	2.5	W
	T _A = 70 °C		1.6	
Operating Junction & Storage Temperature Range		T _j , T _{stg}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNIT
Junction-to-Case	R _{θJC}	25	50	°C / W
Junction-to-Ambient ³	R _{θJA}			

¹Pulse width limited by maximum junction temperature.

²Duty cycle ≤ 1%

³50°C / W when mounted on a 1 in² pad of 2 oz copper.

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{GS} = 0V, I_D = -250\mu\text{A}$	-40			V
Gate Threshold Voltage	$V_{GS(\text{th})}$	$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$	-1.0	-1.8	-3.0	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 20V$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -32V, V_{GS} = 0V$			-1	μA
		$V_{DS} = -30V, V_{GS} = 0V, T_J = 125^\circ\text{C}$			-10	
On-State Drain Current ¹	$I_{D(\text{ON})}$	$V_{DS} = -5V, V_{GS} = -10V$	-9.5			A
Drain-Source On-State Resistance ¹	$R_{DS(\text{ON})}$	$V_{GS} = -10V, I_D = -9\text{A}$		16	18	$\text{m}\Omega$
		$V_{GS} = -4.5V, I_D = -6\text{A}$		22	27	
Forward Transconductance ¹	g_{fs}	$V_{DS} = -5V, I_D = -9\text{A}$		24		S
DYNAMIC						
Input Capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = -20V, f = 1\text{MHz}$		2950		
Output Capacitance	C_{oss}			287		pF
Reverse Transfer Capacitance	C_{rss}			250		
Gate Resistance	R_g	$V_{GS} = 15\text{mV}, V_{DS} = 0V, f = 1\text{MHz}$		4.0		Ω
Total Gate Charge ^{1,2}	Q_g	$V_{DS} = -10V, V_{GS} = -10V, I_D = -10\text{A}$		45.4		
Gate-Source Charge ^{1,2}	Q_{gs}			6.2		nC
Gate-Drain Charge ^{1,2}	Q_{gd}			8.2		
Turn-On Delay Time ^{1,2}	$t_{d(\text{on})}$	$V_{DS} = -15V, I_D = -1\text{A}, V_{GS} = -10V, R_{GS} = 2.7\Omega$		12		
Rise Time ^{1,2}	t_r			25		nS
Turn-Off Delay Time ^{1,2}	$t_{d(\text{off})}$			30		
Fall Time ^{1,2}	t_f			24		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ($T_C = 25^\circ\text{C}$)						
Continuous Current	I_S				-3	A
Pulsed Current ³	I_{SM}				-12	
Forward Voltage ¹	V_{SD}	$I_F = I_S \text{ A}, V_{GS} = 0V$			-1.2	V
Reverse Recovery Time	t_{rr}	$I_F = I_S, dI_F/dt = 100\text{A} / \mu\text{s}$		30		nS
Reverse Recovery Charge	Q_{rr}			25		nC


¹Pulse test : Pulse Width $\leq 300 \mu\text{sec}$, Duty Cycle $\leq 2\%$.

²Independent of operating temperature.


³Pulse width limited by maximum junction temperature.

Ordering & Marking Information:

Device Name: EMB16P04G for SOP-8

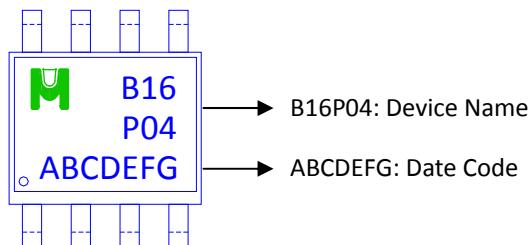

Outline Drawing

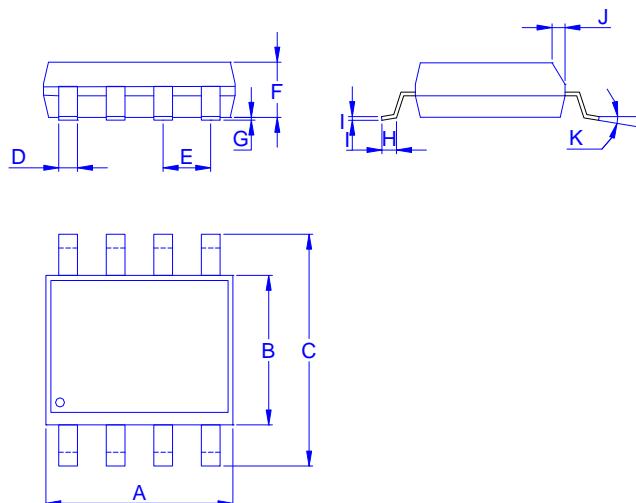

Dimension in mm

Dimension	A	B	C	D	E	F	G	H	I	J	K
Min.	4.70	3.70	5.80	0.33		1.20	0.08	0.40	0.19	0.25	0°
Typ.					1.27						
Max.	5.10	4.10	6.20	0.51		1.62	0.28	0.83	0.26	0.50	8°

TYPICAL CHARACTERISTICS

