

N-Channel Logic Level Enhancement Mode Field Effect Transistor



Product Summary:

BV_{DSS}	30V
$R_{DS(on)}$ (MAX.)	20m Ω
I_D	12A

N-Channel MOSFET

UIS, R_g 100% Tested

Pb-Free Lead Plating & Halogen Free



ABSOLUTE MAXIMUM RATINGS ($T_A = 25\text{ }^\circ\text{C}$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNIT
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current	$T_C = 25\text{ }^\circ\text{C}$	I_D	12	A
	$T_A = 25\text{ }^\circ\text{C}$		9	
	$T_C = 100\text{ }^\circ\text{C}$		9	
Pulsed Drain Current ¹		I_{DM}	48	
Avalanche Current		I_{AS}	10	
Avalanche Energy	$L = 0.1\text{mH}$, $I_{AS}=10\text{A}$, $R_G=25\Omega$	E_{AS}	5	mj
Repetitive Avalanche Energy ²	$L = 0.05\text{mH}$	E_{AR}	2.5	
Power Dissipation	$T_C = 25\text{ }^\circ\text{C}$	P_D	21	W
	$T_C = 100\text{ }^\circ\text{C}$		8.3	
Power Dissipation	$T_A = 25\text{ }^\circ\text{C}$	P_D	2.5	W
	$T_A = 100\text{ }^\circ\text{C}$		1	
Operating Junction & Storage Temperature Range		T_J, T_{stg}	-55 to 150	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNIT
Junction-to-Case	$R_{\theta JC}$		6	$^\circ\text{C} / \text{W}$
Junction-to-Ambient ³	$R_{\theta JA}$		50	

¹Pulse width limited by maximum junction temperature.

²Duty cycle $\leq 1\%$

³50 $^\circ\text{C} / \text{W}$ when mounted on a 1 in² pad of 2 oz copper.



ELECTRICAL CHARACTERISTICS (T_J = 25 °C, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	30			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1	1.5	3	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0V, V _{GS} = ±20V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 24V, V _{GS} = 0V			1	μA
		V _{DS} = 20V, V _{GS} = 0V, T _J = 125 °C			25	
On-State Drain Current ¹	I _{D(ON)}	V _{DS} = 10V, V _{GS} = 10V	12			A
Drain-Source On-State Resistance ¹	R _{DS(ON)}	V _{GS} = 10V, I _D = 8A		15.5	20	mΩ
		V _{GS} = 4.5V, I _D = 6A		25	30	
Forward Transconductance ¹	g _{fs}	V _{DS} = 5V, I _D = 8A		16		S
DYNAMIC						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = 15V, f = 1MHz		520		pF
Output Capacitance	C _{oss}			88		
Reverse Transfer Capacitance	C _{rss}			62		
Gate Resistance	R _g	V _{GS} = 15mV, V _{DS} = 0V, f = 1MHz		2.0		Ω
Total Gate Charge ^{1,2}	Q _g (V _{GS} =10V)	V _{DS} = 15V, V _{GS} = 10V, I _D = 8A		11.5		nC
	Q _g (V _{GS} =4.5V)			5		
Gate-Source Charge ^{1,2}	Q _{gs}			1.6		
Gate-Drain Charge ^{1,2}	Q _{gd}			2.8		
Turn-On Delay Time ^{1,2}	t _{d(on)}		V _{DS} = 15V, I _D = 1A, V _{GS} = 10V, R _{GS} = 6Ω		9	
Rise Time ^{1,2}	t _r			12		
Turn-Off Delay Time ^{1,2}	t _{d(off)}			30		
Fall Time ^{1,2}	t _f			15		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T_C = 25 °C)						
Continuous Current	I _S				12	A
Pulsed Current ³	I _{SM}				48	
Forward Voltage ¹	V _{SD}	I _F = 8A, V _{GS} = 0V			1.2	V
Reverse Recovery Time	t _{rr}	I _F = I _S , dI _F /dt = 100A / μS		45		nS
Peak Reverse Recovery Current	I _{RM(REC)}			30		A
Reverse Recovery Charge	Q _{rr}			2		nC



杰力科技股份有限公司
Excelliance MOS Corporation

EMB20N03V

¹Pulse test : Pulse Width $\leq 300 \mu\text{sec}$, Duty Cycle $\leq 2\%$.







²Independent of operating temperature.






³Pulse width limited by maximum junction temperature.

EMC will review datasheet by quarter, and update new version.



TYPICAL CHARACTERISTICS

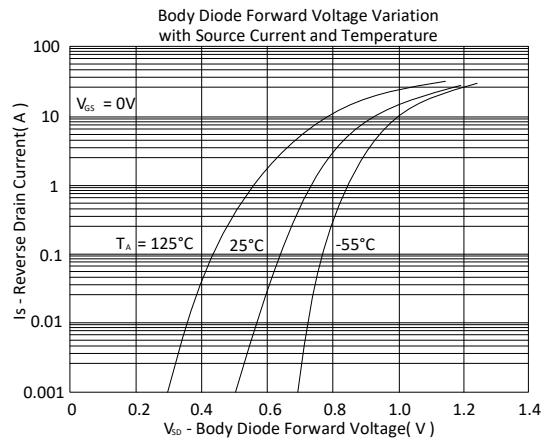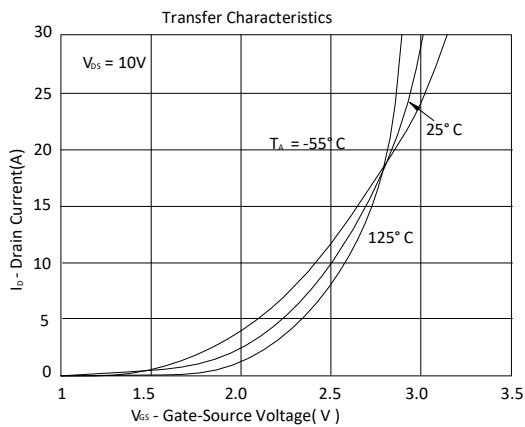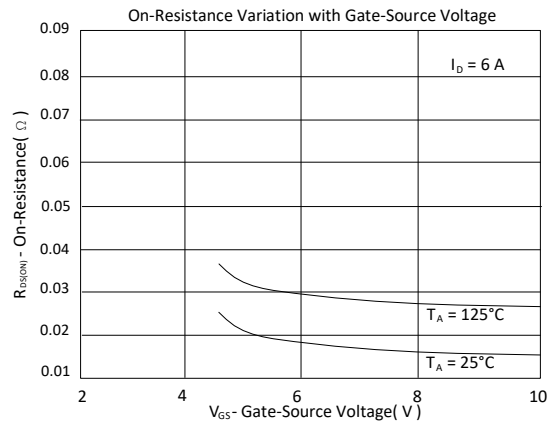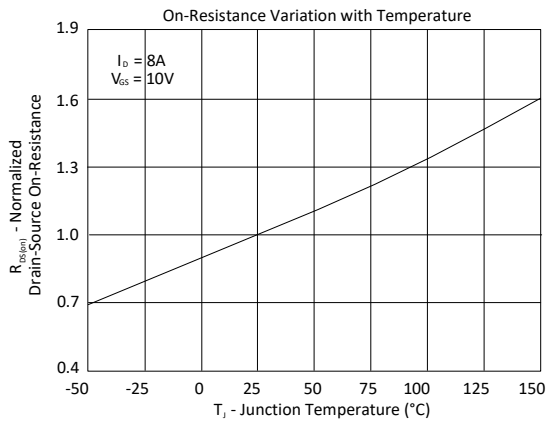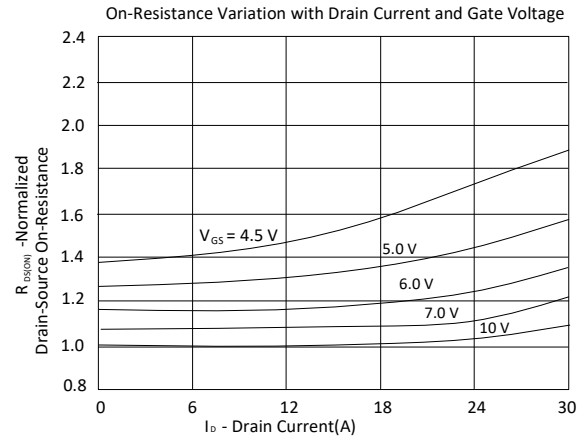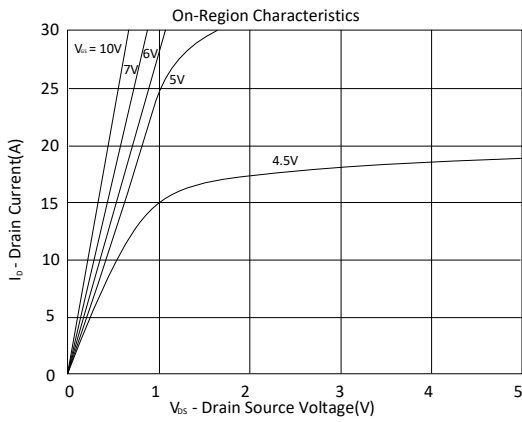

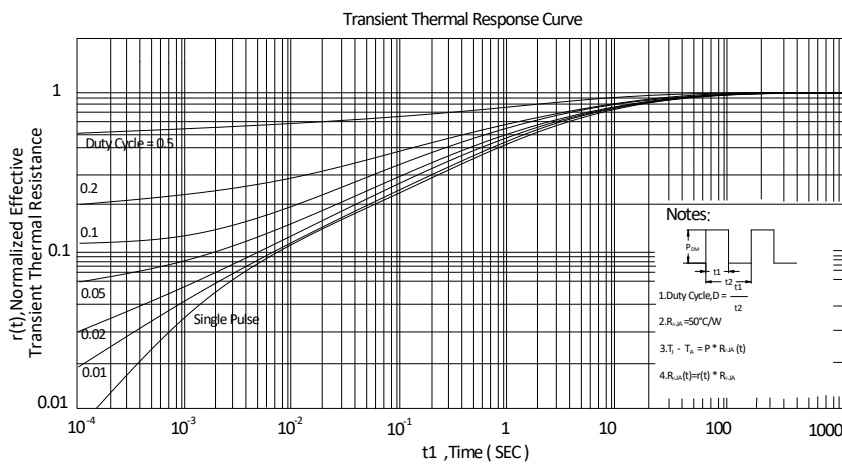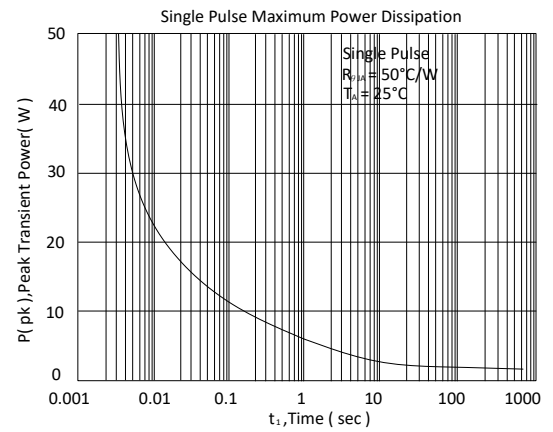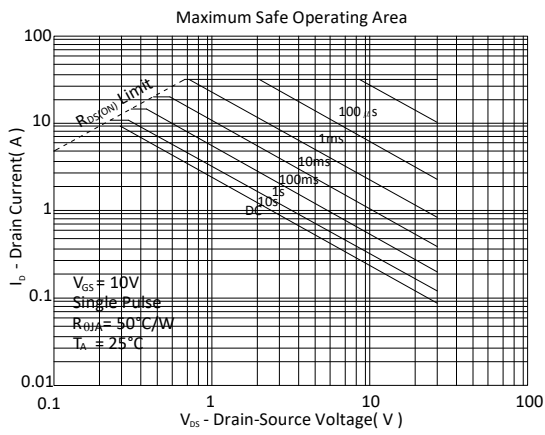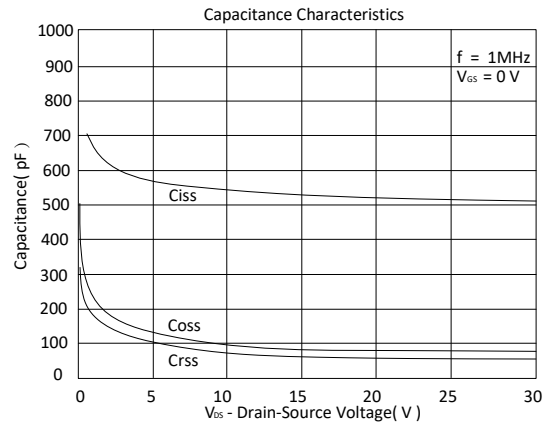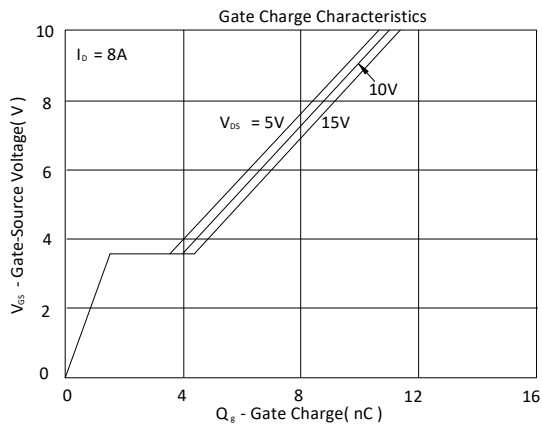

Ordering & Marking Information:

Device Name: EMB20N03V for EDFN3X3



B20N03: Device Name

ABCDEFG: Date Code


A: Assembly House

B: Year(A:2008 B:2009 C:2010....)

C: Month(A:01 B:02 C:03 D:04 E:05 F:06 G:07 H:08 I:09 J:10 K:11 L:12)

DEFG: Serial No.


Outline Drawing

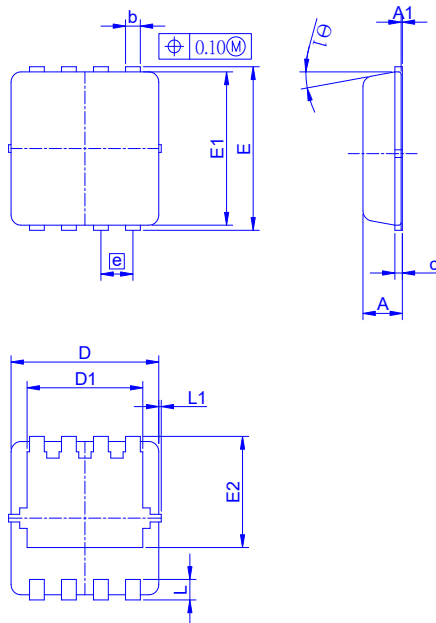

Dimension in mm


Dimension	A	A1	b	c	D	D1	E	E1	E2	e	L	L1	$\theta 1$
Min.	0.65	0	0.20	0.10	2.90	2.15	3.10	2.90	1.53	0.55	0.25	-	0°
Typ.	0.75	-	0.30	0.15	3.00	2.45	3.20	3.00	1.97	0.65	0.40	0.075	10°
Max.	0.90	0.05	0.40	0.25	3.30	2.74	3.50	3.30	2.59	0.75	0.60	0.150	14°

Recommended minimum pads





Tape&Reel Information: 5000pcs/Reel

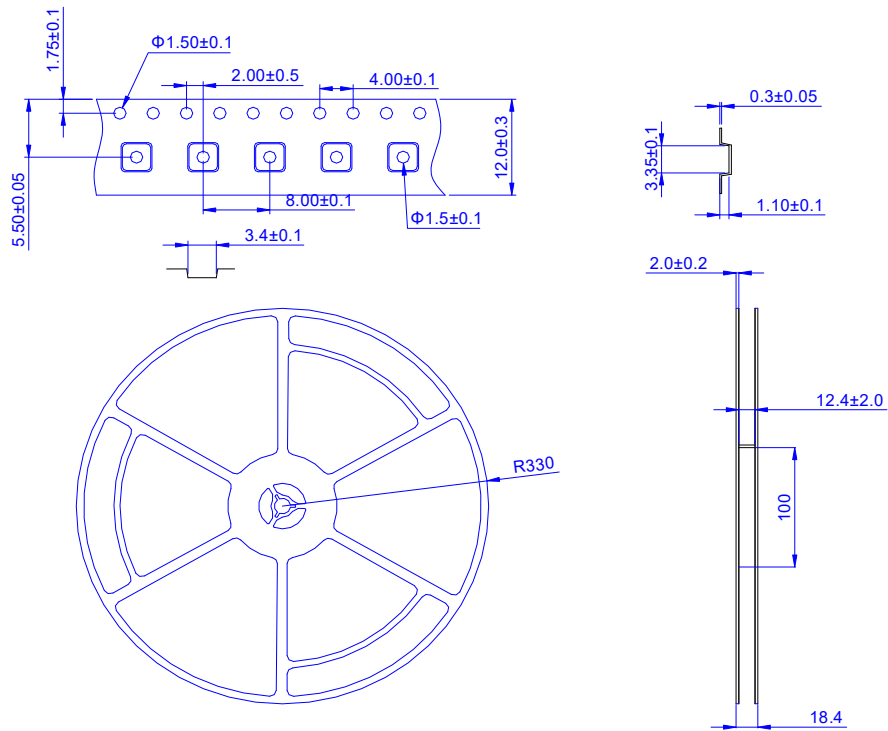

產品別	EDFN3X3
Reel 尺寸	13"
編帶方式	<p>FEED DIRECTION</p>
前空格	50
後空格	50
裝箱數	
滿捲數量	5K
捲/內盒比	1 : 1
內盒滿箱數	5K
內/外箱比	10 : 1
外箱滿箱數	50K