

P-Channel Logic Level Enhancement Mode Field Effect Transistor

Product Summary:


BV_{DSS}	-30V
$R_{DS(on)}$ (MAX.)	8.5mΩ
I_D	-70A

P Channel MOSFET

UIS, R_g 100% Tested

Pb-Free Lead Plating & Halogen Free

ESD Protection

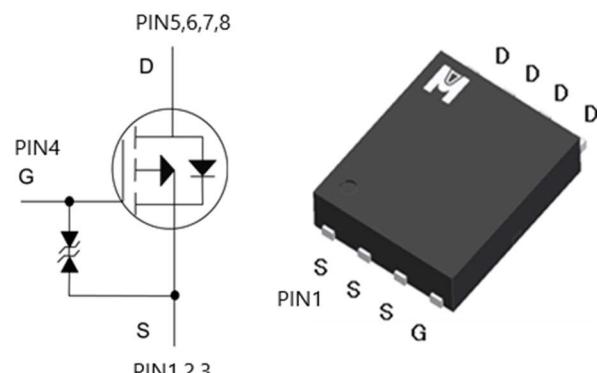

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNIT
Gate-Source Voltage		V_{GS}	±20	V
Continuous Drain Current	$T_C = 25^\circ C$	I_D	-70	A
	$T_A = 25^\circ C (t \leq 10s)$		-21	
	$T_A = 25^\circ C$ (Steady-State)		-14	
	$T_C = 100^\circ C$		-50	
Pulsed Drain Current ¹		I_{DM}	-150	
Avalanche Current		I_{AS}	-50	
Avalanche Energy	$L = 0.1mH, I_{AS}=-50A, R_G=25\Omega$	E_{AS}	125	mJ
Power Dissipation	$T_C = 25^\circ C$	P_D	50	W
	$T_C = 100^\circ C$		20	
Power Dissipation	$T_A = 25^\circ C$	P_D	2.5	W
	$T_A = 100^\circ C$		1	
Operating Junction & Storage Temperature Range		T_J, T_{stg}	-55 to 150	°C

100% UIS testing in condition of $V_D=-15V$, $L=0.1mH$, $V_G=-10V$, $I_L=-40A$, Rated $V_{DS}=-30V$ P-CH

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE		SYMBOL	TYPICAL	MAXIMUM	UNIT
Junction-to-Case		R_{JC}		2.5	°C / W
Junction-to-Ambient ³	$t \leq 10s$	R_{JA}		20	
Junction-to-Ambient ³	Steady-State	R_{JA}		50	

¹Pulse width limited by maximum junction temperature.

²Duty cycle ≤ 1%

³50°C / W when mounted on a 1 in² pad of 2 oz copper.

ELECTRICAL CHARACTERISTICS (T_J = 25 °C, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = -250μA	-30			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250μA	-1	-1.5	-2.5	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0V, V _{GS} = ±20V			±10	μA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -24V, V _{GS} = 0V			-1	μA
		V _{DS} = -20V, V _{GS} = 0V, T _J = 125 °C			-10	
On-State Drain Current ¹	I _{D(ON)}	V _{DS} = -5V, V _{GS} = -10V	-70			A
Drain-Source On-State Resistance ¹	R _{D(S)ON}	V _{GS} = -10V, I _D = -15A		7	8.5	mΩ
		V _{GS} = -4.5V, I _D = -12A		10	12.4	
Forward Transconductance ¹	g _f	V _{DS} = -5V, I _D = -15A		26		S
DYNAMIC						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = -15V, f = 1MHz		3091		pF
Output Capacitance	C _{oss}			476		
Reverse Transfer Capacitance	C _{rss}			404		
Gate Resistance	R _g	V _{GS} = 15mV, V _{DS} = 0V, f = 1MHz		3.5		Ω
Total Gate Charge ^{1,2}	Q _g (V _{GS} =10V)	V _{DS} = -15V, V _{GS} = -10V, I _D = -15A		54		nC
	Q _g (V _{GS} =4.5V)			32		
Gate-Source Charge ^{1,2}	Q _{gs}			7.3		
Gate-Drain Charge ^{1,2}	Q _{gd}			13		
Turn-On Delay Time ^{1,2}	t _{d(on)}	V _{DS} = -15V, I _D = -1A, V _{GS} = -10V, R _{GS} = 2.7Ω		24		nS
Rise Time ^{1,2}	t _r			20		
Turn-Off Delay Time ^{1,2}	t _{d(off)}			70		
Fall Time ^{1,2}	t _f			12		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T_C = 25 °C)						
Continuous Current	I _s	I _F = I _s , dI _F /dt = 100A / μs			-70	A
Pulsed Current ³	I _{SM}				-150	
Forward Voltage ¹	V _{SD}				-1.2	V
Reverse Recovery Time	t _{rr}			52		nS
Reverse Recovery Charge	Q _{rr}			60		nC



EMZB08P03H







¹Pulse test : Pulse Width \leq 300 μ sec, Duty Cycle \leq 2%.






²Independent of operating temperature.

³Pulse width limited by maximum junction temperature.

EMC will review datasheet by quarter, and update new version.

TYPICAL CHARACTERISTICS

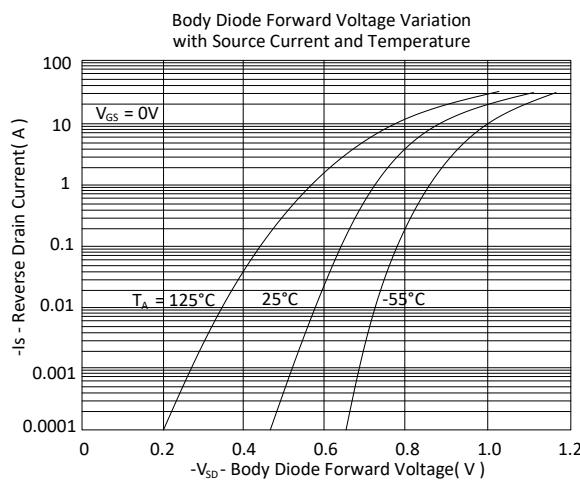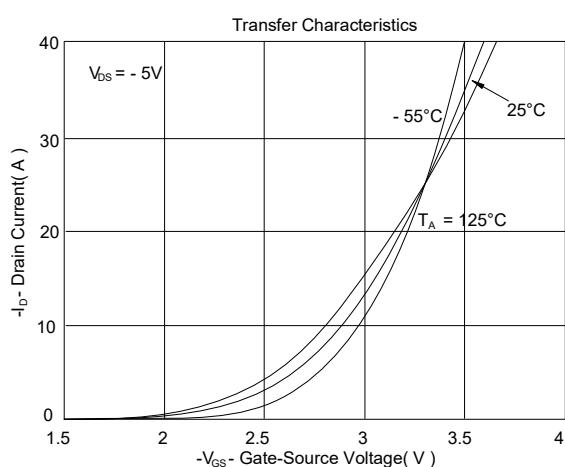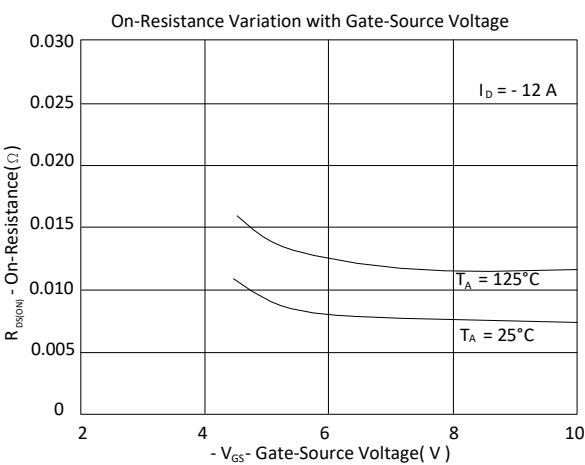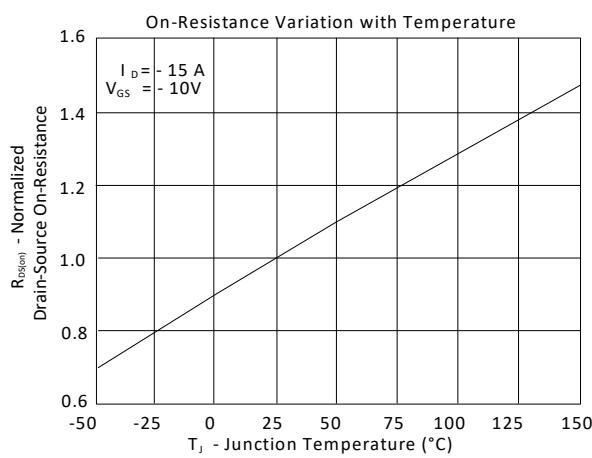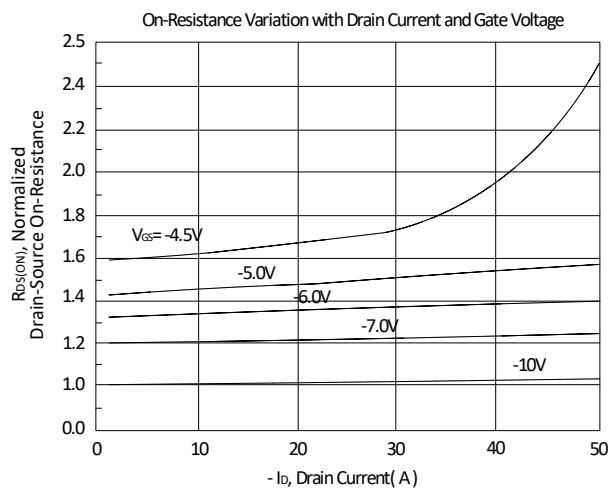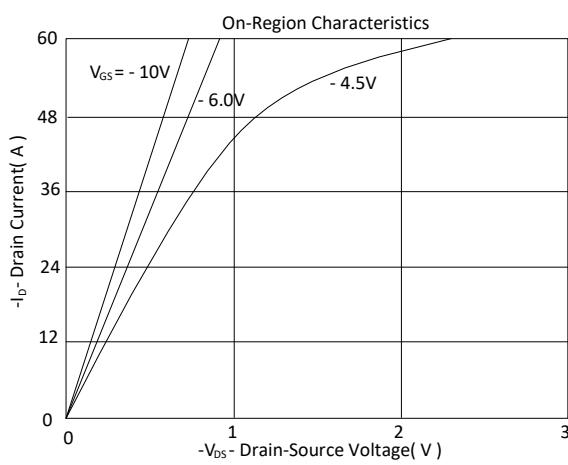

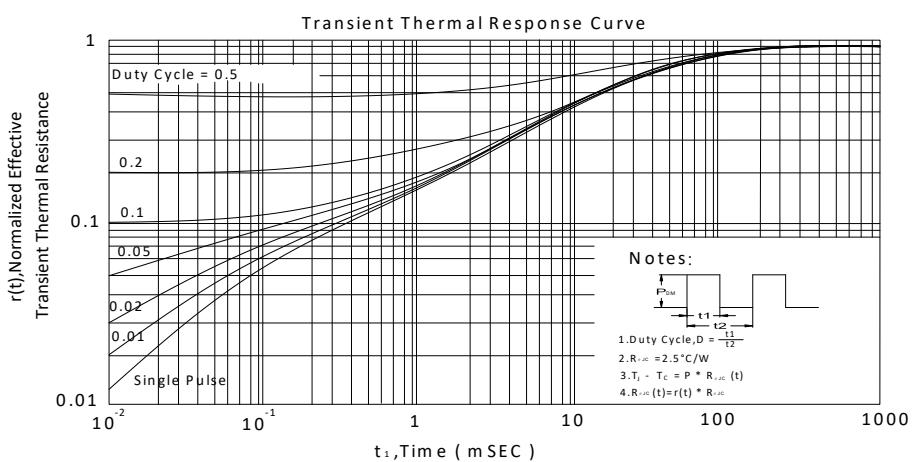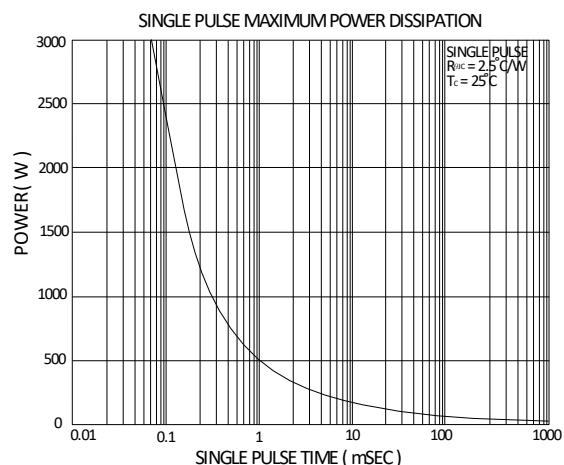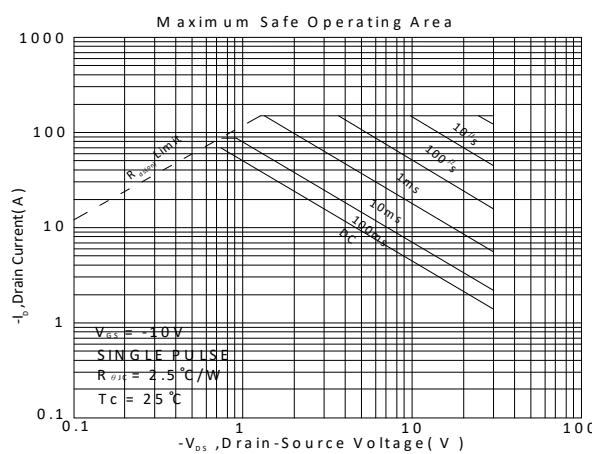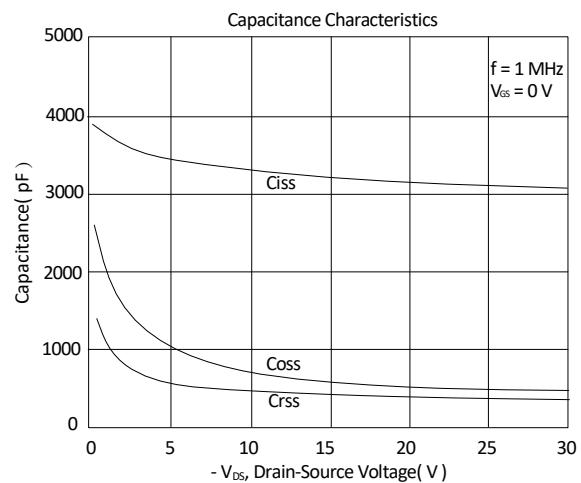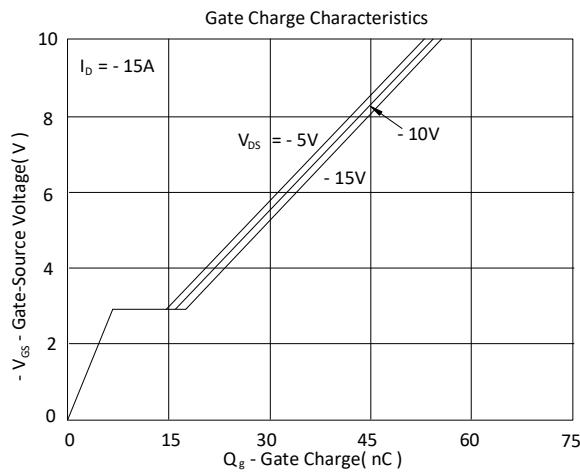


Ordering & Marking Information:

Device Name: EMZB08P03H for EDFN5X6



- ZB08P03: Device Name
- ABCDEFG: Date Code
- A: Assembly House
- B: Year(A:2008 B:2009 C:2010...)
- C: Month(A:01 B:02 C:03 D:04 E:05 F:06 G:07 H:08 I:09 J:10 K:11 L:12)
- DEFG: Serial No.


Outline Drawing

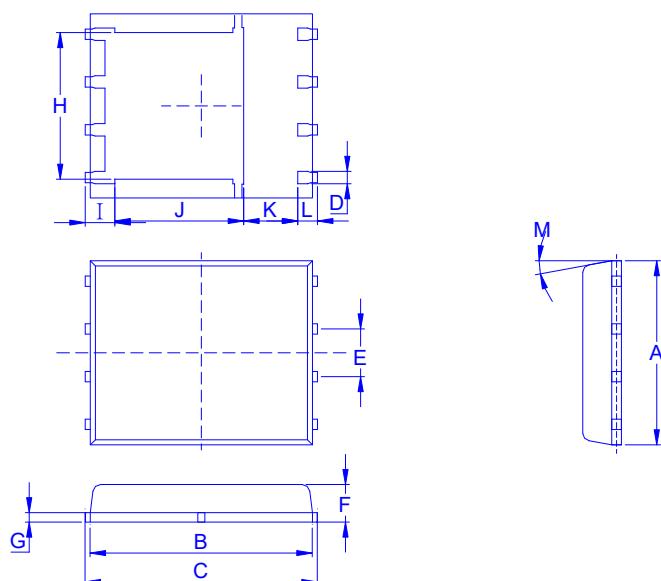

Dimension in mm


Dimension	A	B	C	D	E	F	G	H	I	J	K	L	M
Min	4.80	5.55	5.90	0.30	1.17	0.85	0.15	3.61	0.38	3.18	1.00	0.38	0 °
Typ.	4.90	5.70	6.00	0.40	1.27	0.95	0.20	3.87	0.40	3.44	1.20	0.40	
Max	5.40	5.85	6.15	0.51	1.37	1.17	0.34	4.31	0.71	3.78	1.39	0.71	12 °

Recommended minimum pads

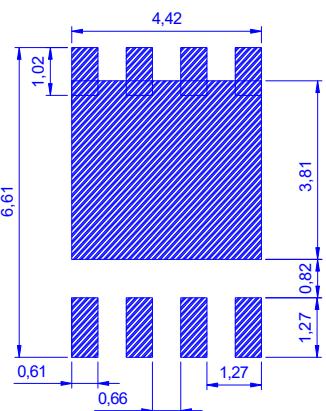



Tape&Reel Information:2500pcs/Reel(Dimension in millimeter)

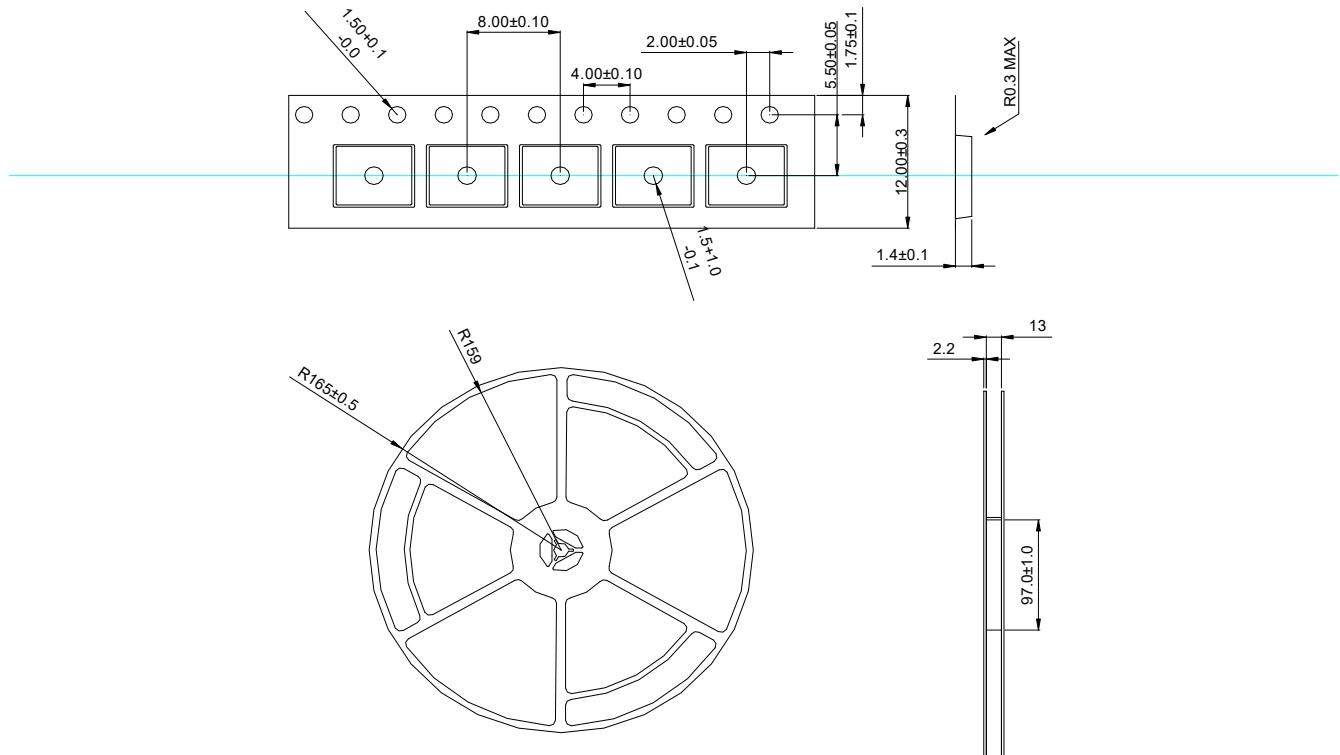

產品別	EDFN5X6
Reel 尺寸	13"
編帶方式	FEED DIRECTION  
前空格	25
後空格	50
裝箱數	
滿捲數量	2.5K
捲/內盒比	1 : 1
內盒滿箱數	2.5K
內/外箱比	10 : 1
外箱滿箱數	25K